

Pipe conduit with slit


This corrugated conduit is used to isolate underfloor heating flow pipes between the manifold and the subsequent room being heated. It can also be used for general protection for cables for office and private applications.

This one-piece corrugated conduit can be easily retro fitted to an existing pipe. To begin the installation, open the conduit and insert the pipe so that the pipe is covered and the split is closed.



Product Code	Product Description
TIOCON0001	25m black pipe conduit

Outside mm	Insdie mm	Coil Length	Coil weight	Box quantity	Pallet quantity
23.9	19.2	25m	0.90kg	20 coil / 500m	40 coils / 1000m

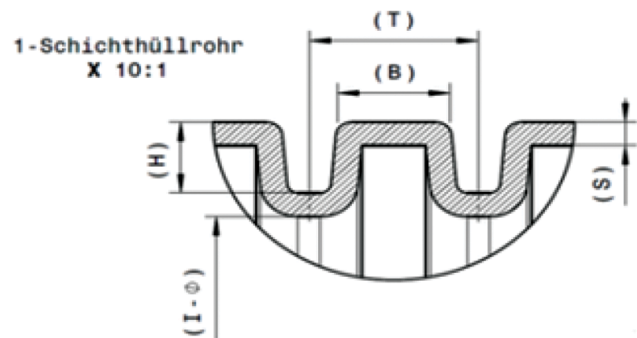

Schutzrohr-1 Schichten, Anlagen: 451 und 457							(Gewicht) ⑤⑥	
DN	(A-φ)	(I-φ)	(S) min	(T)	(B)	(H)		
19	23,9±0,3	19,2±0,3	0,3	3,3	2,2	2,0		